


Topakustik Perfo T

16/16/10-5

TOP(A)K(U)S(T)I(K) 

Acoustic panel solutions



formerly: TOPPERFO-T 16/16/10-5

Developed and successfully used by Topakustik, the T-Perforation has a discreet effect while still offering high-performance absorption. Topakustik Perfo T is available with perforation bores of 3, 4 and 5 mm. The smaller the visible perforations, the more the maximum absorption shifts to the lower frequency.



Panels

Panels are used for removable or fixed ceilings and walls with visible joints. Panels can be provided with a number of different edges and are also suited for cabinet fronts and room dividers.

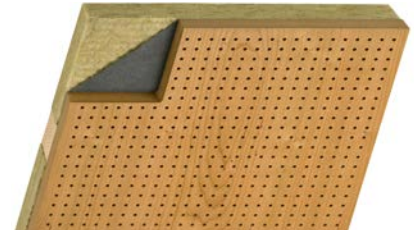

Normally flammable D-s2,d0 / CH RF 3

		
Painted 16 mm	Real wood veneer 17 mm	Melamine 16 mm

Flame retardant B-s1,d0 / CH RF 2

		
Painted 16 mm	Real wood veneer 17 mm	Melamine 16 mm

RESAP® core panel, non-combustible

	
Painted 16 mm	Real wood veneer 17 mm


maximal

3648 × 1216	3648 × 1216	3648 × 1216	3648 × 1216	3648 × 1216	3648 × 1216	3080 × 1216	3080 × 1216
-------------	-------------	-------------	-------------	-------------	-------------	-------------	-------------


ideal = means optimal use of MDF core – custom lengths are also available

2032 × 992	2032 × 992	2032 × 992	2032 × 992	2032 × 992	2032 × 992	1540 × 608	1540 × 608
2780 × 992	2780 × 992	2780 × 992	2780 × 992	2780 × 992	2780 × 992	3080 × 608	3080 × 608
3648 × 640	3648 × 640				3640 × 640		

16/16/10-5



Edges

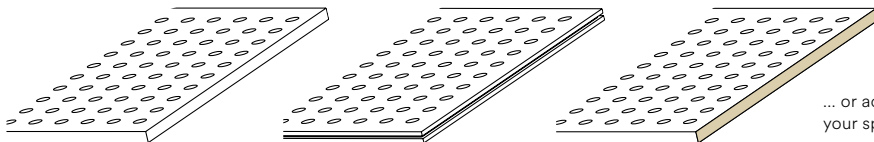


Clean cut

With surrounding tongue and groove

Visible edge

... or according to your specifications

Mounting



Topakustik Perfo T,
Ø 5 mm
Special screws
Blind Series

Sound absorption data acc. to ISO 354

Suspension height:

— approx. 216 mm

..... approx. 56 mm

with acoustic fleece and Mineral wool 30 mm (60 kg/m³)



See installation manual!