

# Topakustik Classic


## 6/2 M or T

TOP(A)K(U)S(T)I(K) 

Acoustic panel solutions


formerly: TOPAKUSTIK 6/2 M or T

Compared to wider grooves, this grooving is less visible as the interplay of light and shadow appears constant due to the narrow groove spacing and therefore appears more flat. The narrow grooves require perfect assembly, as even the smallest differences in the surface are visible.

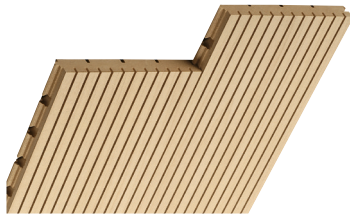

### Planks

Thanks to the precise tongue and groove connection, planks result in an attractive surface with a joint-free appearance, because the connecting joint matches the dimension of the grooves. The planks permit simple and flexible assembly. They can be installed by stapling to a timber batten. Installation with turning-clip is only possible with thickness of 19/20mm.

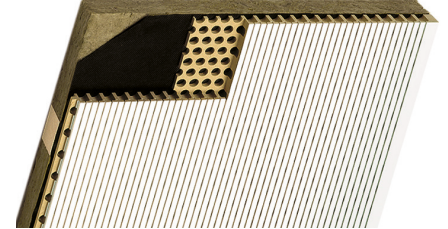

#### Normally flammable D-s2,d0 / CH RF 3




#### Flame retardant B-s1,d0 / CH RF 2



Standard					
2780 × 128	2780 × 128	2780 × 128	2780 × 128	2780 × 128	2780 × 128
3640 × 128		3640 × 128		3640 × 128	
4080 × 128	4080 × 128	4080 × 128	4080 × 128	4080 × 128	4080 × 128

Custom lengths are also available



### Panels

Panels are used for removable or fixed ceilings and walls with visible joints. Panels can be provided with a number of different edges and are also suited for cabinet fronts and room dividers.

#### Normally flammable D-s2,d0 / CH RF 3



#### Flame retardant B-s1,d0 / CH RF 2




maximal					
4080 × 1216	3640 × 1216	4080 × 1216	4080 × 1216	3640 × 1216	4080 × 1216
ideal = means optimal use of MDF core – custom lengths are also available					
2040 × 992/ 640	2040 × 992/ 640	2040 × 992/ 640	2040 × 992/ 640	2040 × 992/ 640	2040 × 992/ 640
2780 × 992/ 640	2780 × 992/ 640	2780 × 992/ 640	2780 × 992/ 640	2780 × 992/ 640	2780 × 992/ 640
3640 × 640	3640 × 640	3640 × 640		3640 × 640	3640 × 640

#### 6/2 M-7%

αw	Euro	NRC
0.85 M	B	0.91
0.80 M	B	0.86

#### 6/2 T

αw	Euro	NRC
0.40 LM	D	0.57
0.40 LM	D	0.62

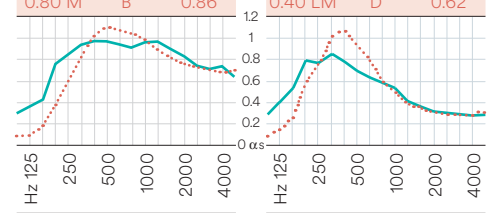

### Sound absorption data acc. to ISO 354

- approx. 216 mm
- ..... approx. 56 mm

with acoustic fleece and Mineral wool 30 mm (60 kg/m<sup>3</sup>)