


# Topakustik Classic


## 12/4 M or T

TOP(A)K(U)S(T)I(K) 

Acoustic panel solutions



formerly: TOPAKUSTIK 12/4 M or T

The most popular Topakustik types. High sound absorption combined with easy assembly. The grooving remains visible even from a long distance.

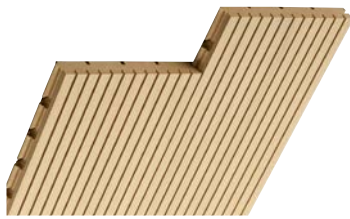

### Planks

Thanks to the precise tongue and groove connection, planks result in an attractive surface with a joint-free appearance, because the connecting joint matches the dimension of the grooves. The planks permit simple and flexible assembly. They can be installed by stapling to a timber batten or clamping to a H/T-bar with turning-clips.

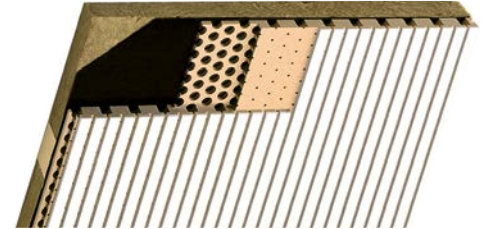

#### Normally flammable D-s2,d0 / CH RF 3



2780 × 128	2780 × 128	2780 × 128
3640 × 128		
4080 × 128	4080 × 128	

#### Flame retardant B-s1,d0 / CH RF 2



2780 × 128	2780 × 128	2780 × 128
3640 × 128		
4080 × 128	4080 × 128	

#### RESAP® core panel, non-combustible



2540 × 128	2540 × 128
3080 × 128	3080 × 128

Custom lengths are also available



### Panels

Panels are used for removable or structured ceiling and wall finishes. The larger width (compared to the planks) requires a joint between the panels in order to absorb the material expansion. Panels can be fitted with a number of different edges, and are thus also suited for cabinet fronts and room dividers.

#### Normally flammable D-s2,d0 / CH RF 3



4080 × 1216	3640 × 1216	4080 × 1216
ideal = means optimal use of MDF core – custom lengths are also available		
2040 × 992/640	2040 × 992/640	2040 × 992/640
2780 × 992/640	2780 × 992/640	2780 × 992/640
3640 × 640	3640 × 640	

#### Flame retardant B-s1,d0 / CH RF 2



4080 × 1216	3640 × 1216	4080 × 1216
ideal = means optimal use of MDF core – custom lengths are also available		
2040 × 992/640	2040 × 992/640	2040 × 992/640
2780 × 992/640	2780 × 992/640	2780 × 992/640
3640 × 640		


#### RESAP® core panel, non-combustible



3080 × 1216	3080 × 1216
1540 × 608	1540 × 608
2540 × 608	2540 × 608
3080 × 608	3080 × 608


#### 12/4 M-15%

αw	Euro	NRC
0.80	B	0.89
0.80 M	B	0.86




#### 12/4 M-7.5%

αw	Euro	NRC
0.75 L	C	0.78
0.65 LM	C	0.77




#### 12/4 M-12%-Resap

αw	Euro	NRC
0.90	A	0.85
0.85	B	0.86



#### 12/4 T

αw	Euro	NRC
0.55 LM	D	0.71
0.55 LM	D	0.74



### Sound absorption data acc. to ISO 354

#### Suspension height:

— approx. 223 / 246 / 216 mm

..... approx. 83 / 96 / 56 mm

with acoustic fleece and Mineral wool 30 mm (60 kg/m<sup>3</sup>)